



## GSM 860-970 MHz SV antennas power dividers SV-2GL, SV-3GL, SV-4GL

107497, Moscow Chernicinsky pr-d 7/1  
Tel.: (495) 775-43-19, 462-44-14  
Tel./fax: 462-44-14  
E-mail: radial@radial.ru  
www.radial.ru



SV-2GL



SV-3GL



SV-4GL


### Electrical specifications

Model	SV-2GL	SV-3GL	SV-4GL
Operating frequency band, MHz	870-960	870-960	870-960
Insertion loss, dB	0.15	0.15	0.15
Impedance, Ohm	50	50	50
VSWR, not more than	1.15	1.15	1.15
Input power, not more, W	600	600	600
Temperature range, °C		from -30 to +60	
Inputs	2	3	4


### Mechanical specifications

Model	SV-2GL	SV-3GL	SV-4GL
Weight, g	204	246	280
Connects to feeder with	N-female	N-female	N-female
Connects to antenna with	N-female	N-female	N-female
Dimensions, mm	118x62x25	110x62x45	110x62x62


### Typical dividers characteristics

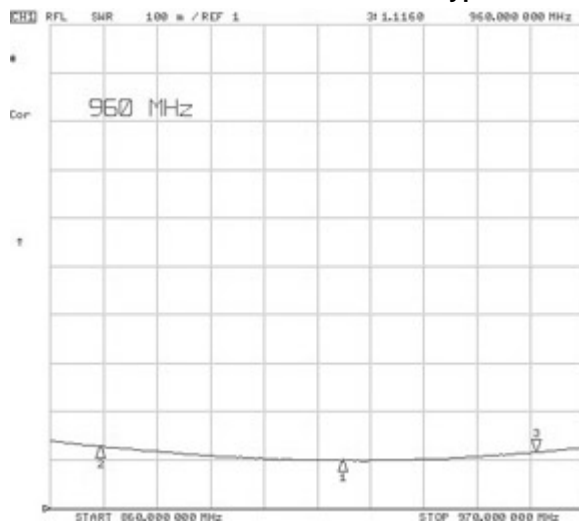

SV-2GL

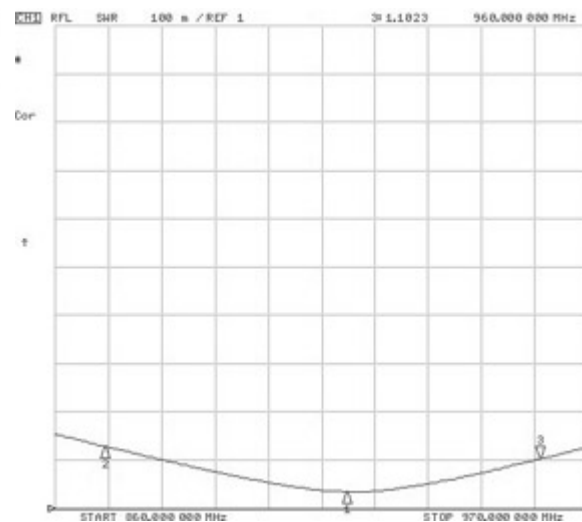

SV-3GL

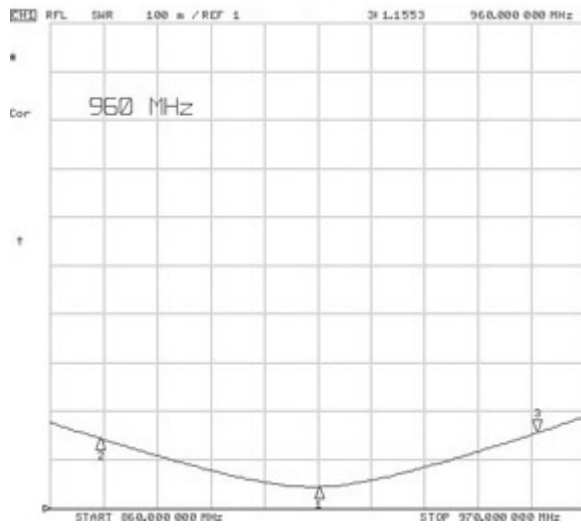

SV-4GL