



107497, Moscow Chernicinsky pr-d 7/1  
Tel.: (495) 775-43-19, 462-44-14  
Tel./fax: 462-44-14  
E-mail: radial@radial.ru  
www.radial.ru


## Coaxial loads

Model	Description	Freq.band, MHz	Price, EUR
NB-0.2	50 Ohm, 0,2W, N-male	0-500	14
NBC-5	50 Ohm, 5 W, N-male	0-500	32
NB-35	50 Ohm, 35 W, N-male	0-500	83
NB-50	50 Ohm, 50 W, N-female	0-500	99
NBC-50	50 Ohm, 50 W, N-male	0-500	127
NB-60	50 Ohm, 60 W, N-male	0-500	70
NBC-100	50 Ohm, 100 W, N-male	0-500	167
NB-100X	50 Ohm, 100 W, N-male	0-500	97

2011



## Coaxial loads NB-0.2, NB-50, NBC-50, NB-100

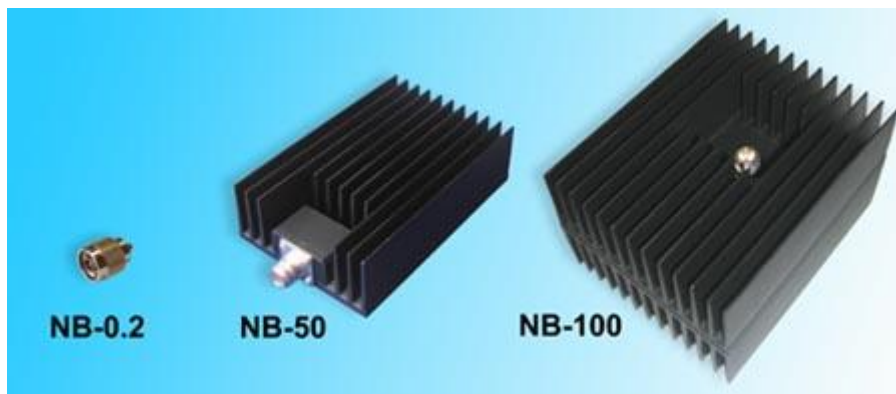

### Electrical specifications


Model	NB-50	NB-0.2	NB-100
Operating frequency band, MHz		0-500	
Impedance, Ohm		50	
VSWR, not more than	1,12	1,12	1,35
Input power, not more, W	50	0,2	100
Temperature range, °C		from -55 to +65	

### Mechanical specifications


Model	NB-50	NB-0,2	NB-100
Weight, kg	0.75	0.03	1.48
Connectors	N-female	N-male	N-female
Length/Width/Depth , mm	160x120x46	30x20x20	160x120x100

### VSWR

**NB-50**

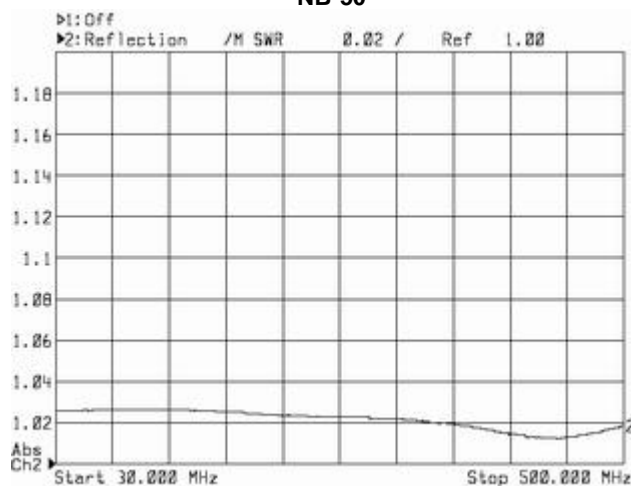


**NB-0.2**

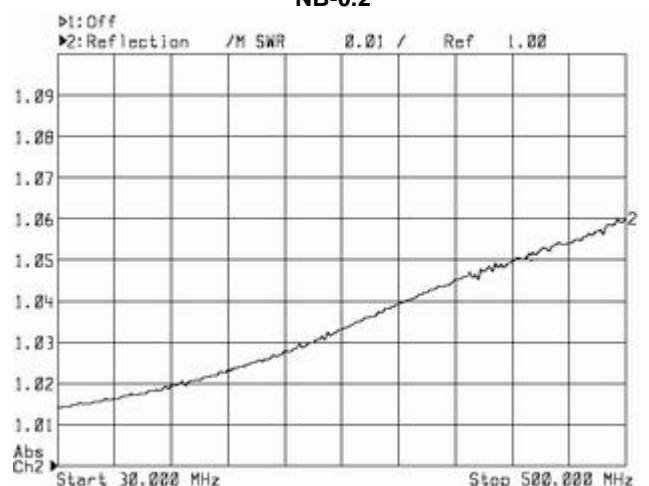



## Coaxial loads NBC-5, NB-35, NB-60, NB-100R

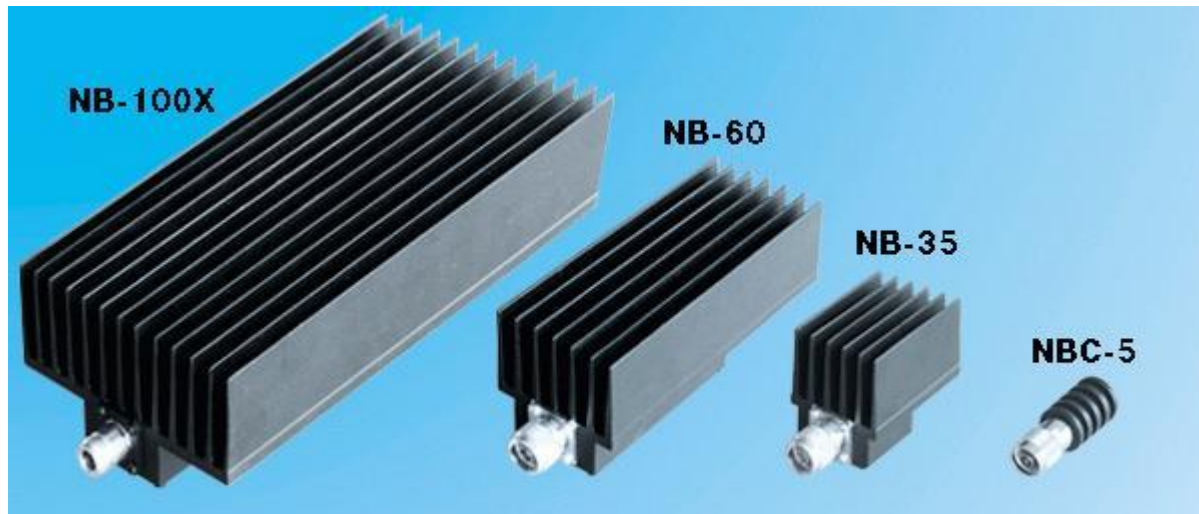



### Electrical specifications

Model	NBC-5	NB-35	NB-60	NB-100X
Operating frequency band, MHz	0-500	0-500	0-500	0-500
Impedance, Ohm	50	50	50	50
VSWR, not more than	1.12	1.12	1.12	1.12
Input power, not more, W	5	35	60	100
Temperature range, °C			from -55 to +100	

### Mechanical specifications

Model	NBC-5	NB-35	NB-60	NB-100X
Weight, kg	0.095	0.22	0.7	1.4
Connectors	N-male	N-male	N-male	N-female
Length/Width/Depth, mm	60x23x23	78x54x66	178x64x66	240x122x66

### VSWR

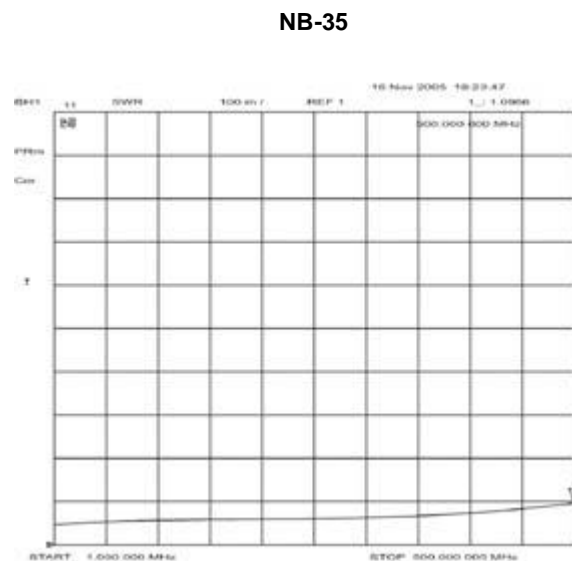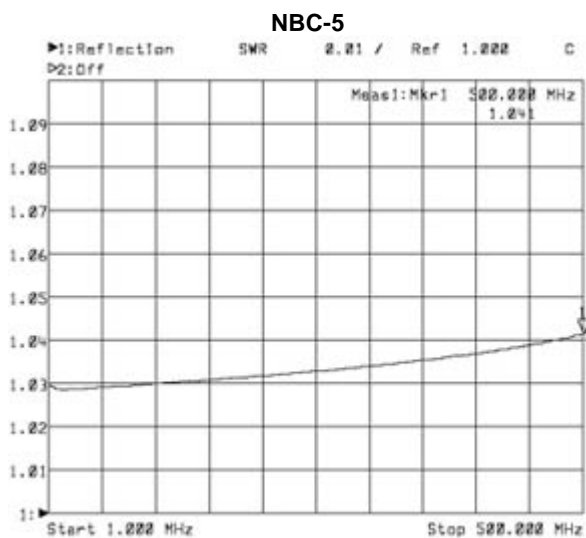

### NB-60

