




## 140-174, 300-360, 400-490 MHz 4-way receiver power splitters PRP-4V, PRP-4A, PRP-4U

107497, Moscow Chernicinsky pr-d 7/1  
Tel.: (495) 775-43-19, 462-44-14  
Tel./fax: 462-44-14  
E-mail: radial@radial.ru  
www.radial.ru

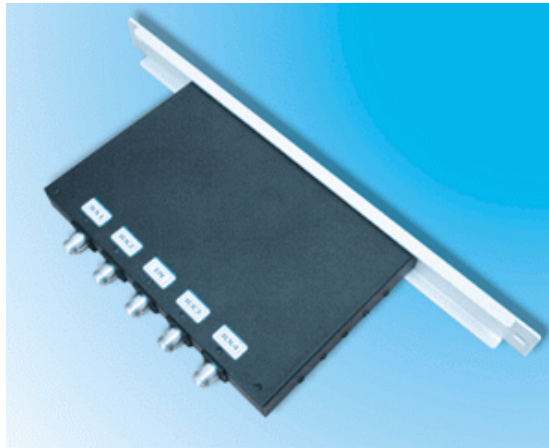

Electrical specifications

Model	PRP-4V	PRP-4A	PRP-4U
Operating frequency band, MHz	140-174	300-360	400-490
Operating bandwidth, MHz	15	30	40
Min. level of isolation, dB		30	
Typical level of isolation, not less, dB		50	
Gain, dB		6,2	
VSWR, not more than		1,5	
Impedance, Ohm		50	

Mechanical specifications

Model	PRP-4V	PRP-4A	PRP-4U
Weight, kg		0,78	
Length/Width/Depth, mm		480x56x96	
Temperature range, °C		from -30 to +50	
Connectors		N-female	

4-way receiver power splitters PRP-4 are used in multichannel mobile radio communication systems to connect four repeater receivers to common antenna. Physically they represent combination of Wilkinson resonance bridges and provide not less than 30 dB decoupling between receivers input connectors, essential for prevention of intermodulation throbs between them. Additionally, amplifier AGS-19 can be implemented for loss compensation. Receiver power splitters is design for 19-inch rack mount. Spear port should be "pegged" by 50-Ohm load NC-0.2 to provide circuit balance, when only three receivers are operating.

### Typical gain-frequency characteristics PRP-4V

