



1-30 MHz Baluns BR-800-1(2.5/4/6/11/16)

107497, Moscow Chernicinsky pr-d 7/1
 Tel.: (495) 775-43-19,462-44-14
 Tel./fax: 462-44-14
 E-mail: radial@radial.ru
www.radial.ru

Please visit our partner in EU
www.duplexers.eu




Electrical specifications

Model	Balun
Operating frequency band, MHz	1-30
Impedance ratio	
BR-800-1	1:1
BR-800-2.5	1:2.5
BR-800-4	1:4
BR-800-6	1:6
BR-800-11	1:11
BR-800-16	1:16
Insertion loss, dB	0.2-0.4
Input power, not more, W	1000
Connector	SO-239
Weight, kg	386
Length/Width/Depth, mm	118x100x60
Impedance, Ohm	50



VSWR diagram

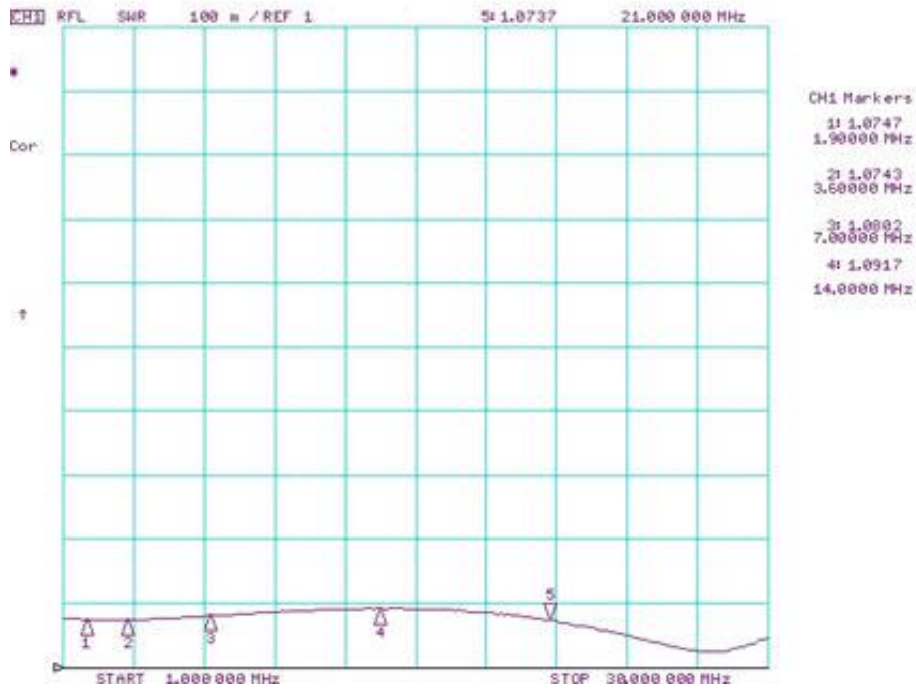

2011