




# 80-40-20-17-12-10 m HF antenna "Windom"

107497, Moscow Chernicinsky pr-d 7/1  
Tel.: (495) 775-43-19, 462-44-14  
Tel./fax: 462-44-14  
E-mail: radial@radial.ru  
www.radial.ru

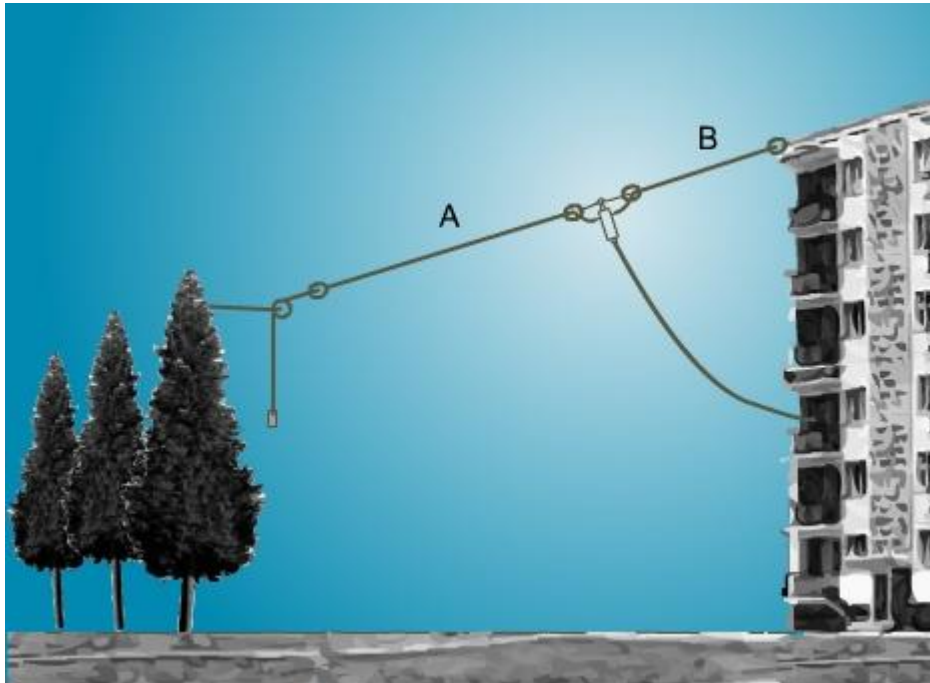

Electrical specifications


Model	W3DZZ+3
Operating frequency band, MHz	
80 m, VSWR not more 1.6	3.5-3.8 MHz
40 m, VSWR not more 1.5	7.0-7.2 MHz
20 m, VSWR not more 1.7	14.0-14.35 MHz
17 m, VSWR not more 1.7	18.06-18.31 MHz
12 m, VSWR not more 1.5	24.9-25.14 MHz
10 m, VSWR not more 2	28-29,5 MHz
Impedance, Ohm	50
Connector	SO-239
Max. power input, W	1000 (SSB, CW)
Length, M	42
Polarization	horizontal

## VSWR diagram "Windom":

80 m



40 m

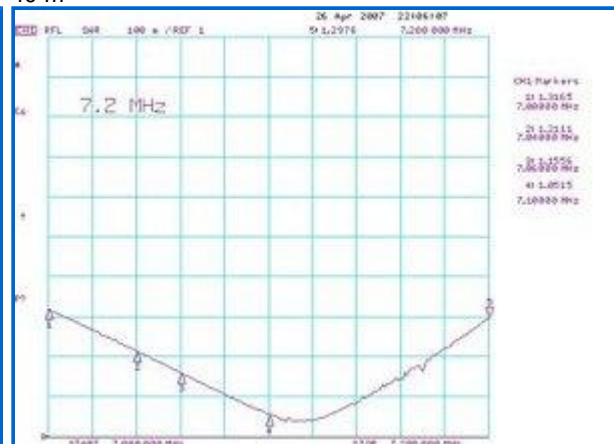

20 m

17 m



12 m

10 m

